


- North
- American
- Signal

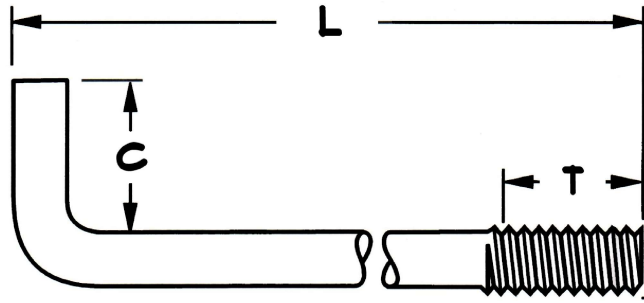

D	L	C	T	WT. PER C
1/2"-13	6"	1 5/8"	2"	32
1/2"-13	8"	1 5/8"	2"	41
1/2"-13	10"	1 5/8"	2"	50
1/2"-13	12"	1 5/8"	2"	59
1/2"-13	14"	1 5/8"	2"	67
1/2"-13	16"	1 5/8"	2"	77
1/2"-13	18"	1 5/8"	2"	85
1/2"-13	24"	2"	4"	113
5/8"-11	6"	3"	3"	60
5/8"-11	8"	3"	3"	74
5/8"-11	10"	3"	3"	87
5/8"-11	12"	3"	4"	102
5/8"-11	14"	3"	4"	115
5/8"-11	15"	3"	4"	122
5/8"-11	16"	3"	4"	129
5/8"-11	18"	3"	4"	143
5/8"-11	24"	3"	4"	185
3/4"-10	8"	3"	4"	109
3/4"-10	10"	3"	4"	135
3/4"-10	12"	3"	5"	156
3/4"-10	14"	3"	5"	167
3/4"-10	15"	3"	5"	188
3/4"-10	16"	3"	5"	199
3/4"-10	18"	3"	6"	209
3/4"-10	20"	3"	6"	240
3/4"-10	24"	3"	6"	272
3/4"-10	30"	3"	6"	344
3/4"-10	36"	3"	6"	401
7/8"-9	12"	3"	5"	206
7/8"-9	15"	3"	6"	247
7/8"-9	16"	3"	6"	261

AVAILABLE IN PLAIN, SOME SIZES AVAILABLE IN **HOT DIP GALVANIZED**  
 ZINC PLATED, 304SS, AND 316SS UPON SPECIAL ORDER REQUEST AT CURRENT MARKET PRICE  
 ITEMS ARE PITCH BODY UNDERSIZED WITH ROLLED THREADS  
 COMMERCIAL NUT FIT \*\* NOT UNC-2A FIT \*\*  
 USA DOMESTIC MANUFACTURE

DIAMETERS 1/2"-13 THRU 5/8"-11 GENERALLY MADE FROM COLD DRAWN 1006-1018 COIL STEEL  
 DIAMETERS 3/4"-10 AND UP GENERALLY MADE FROM ASTM F1554 GR 55 S1 HOT ROLL ROUNDS  
 HOT DIP GALVANIZED PER ASTM A153  
 ZINC PLATING IS PER ASTM F1941 TYPE V, CLASS SC., 0002 MIN THICKNESS  
 304SS PER ASTM A193 B8 CLASS 1 GENERALLY WHEN MATERIAL AVAILABLE  
 316SS PER ASTM A193 B8M CLASS 1 GENERALLY WHEN MATERIAL AVAILABLE

**STANDARD 90 DEGREE L SHAPED FOUNDATION ANCHOR**

THE INFORMATION ON THIS DRAWING IS INTENDED FOR REFERENCE ONLY  
 TOLERANCES: ( FRACTIONAL = NO LESS THAN +/- 1/8" ) ANGULAR: ( +/- 5° )